

DISPENSING INNOVATIONS FROM DRUMMOND



Stainless Steel Manifolds for Microtest Plates


Feed, Rinse, or Aspirate Multiple Plate Positions Quickly and Easily

- Autoclavable stainless steel and Teflon® construction
- Use for both sample delivery and aspiration operations
- Supplied complete with cleaning wire for easy cleaning
 - Positive Luer lock connection
 - Custom manifolds available

DRUMMOND DISPENSING MANIFOLDS

Catalog Number	Center to Center (mm)	Pin Length (mm)*	Description
3-000-090	9	11	Straight, 4 place for 96 well plate
3-000-093	9	11	Straight, 8 place for 96 well plate
3-000-094	9	11	Bent, 8 place for 96 well plate
3-000-095	-	-	End Caps (all)
3-000-096	9	11	Straight, 12 place for 96 well plate
3-000-097	20	17.5	Straight, 4 place for 24 well plate
3-000-098	20	17.5	Bent, 4 place for 24 well plate
3-000-099	9	11	Bent, 12 place for 96 well plate
3-000-101	4.5	11	Straight, 24 place for 384 well plate
3-000-102	4.5	11	Straight, 16 place for 384 well plate
3-000-103	4.5	11	Bent, 24 place for 384 well plate
3-000-104	4.5	11	Bent, 16 place for 384 well plate

*Pin O.D. .031", I.D. .018"

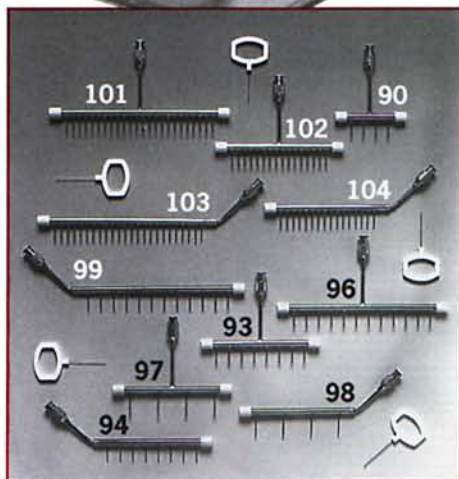

Available through your local distributor



MADE IN USA

Teflon® is a registered trademark of DuPont
©Copyright, Drummond Scientific Company, 1998 Printed in USA



500 Parkway, Box 700
Broomall, PA 19008
Call Toll Free: 1-800/523-7480
FAX: 1-610/353-6204
Website: www.drummondsci.com